


USG ECLIPSE™ ILLUSION™ & PEDESTALS™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

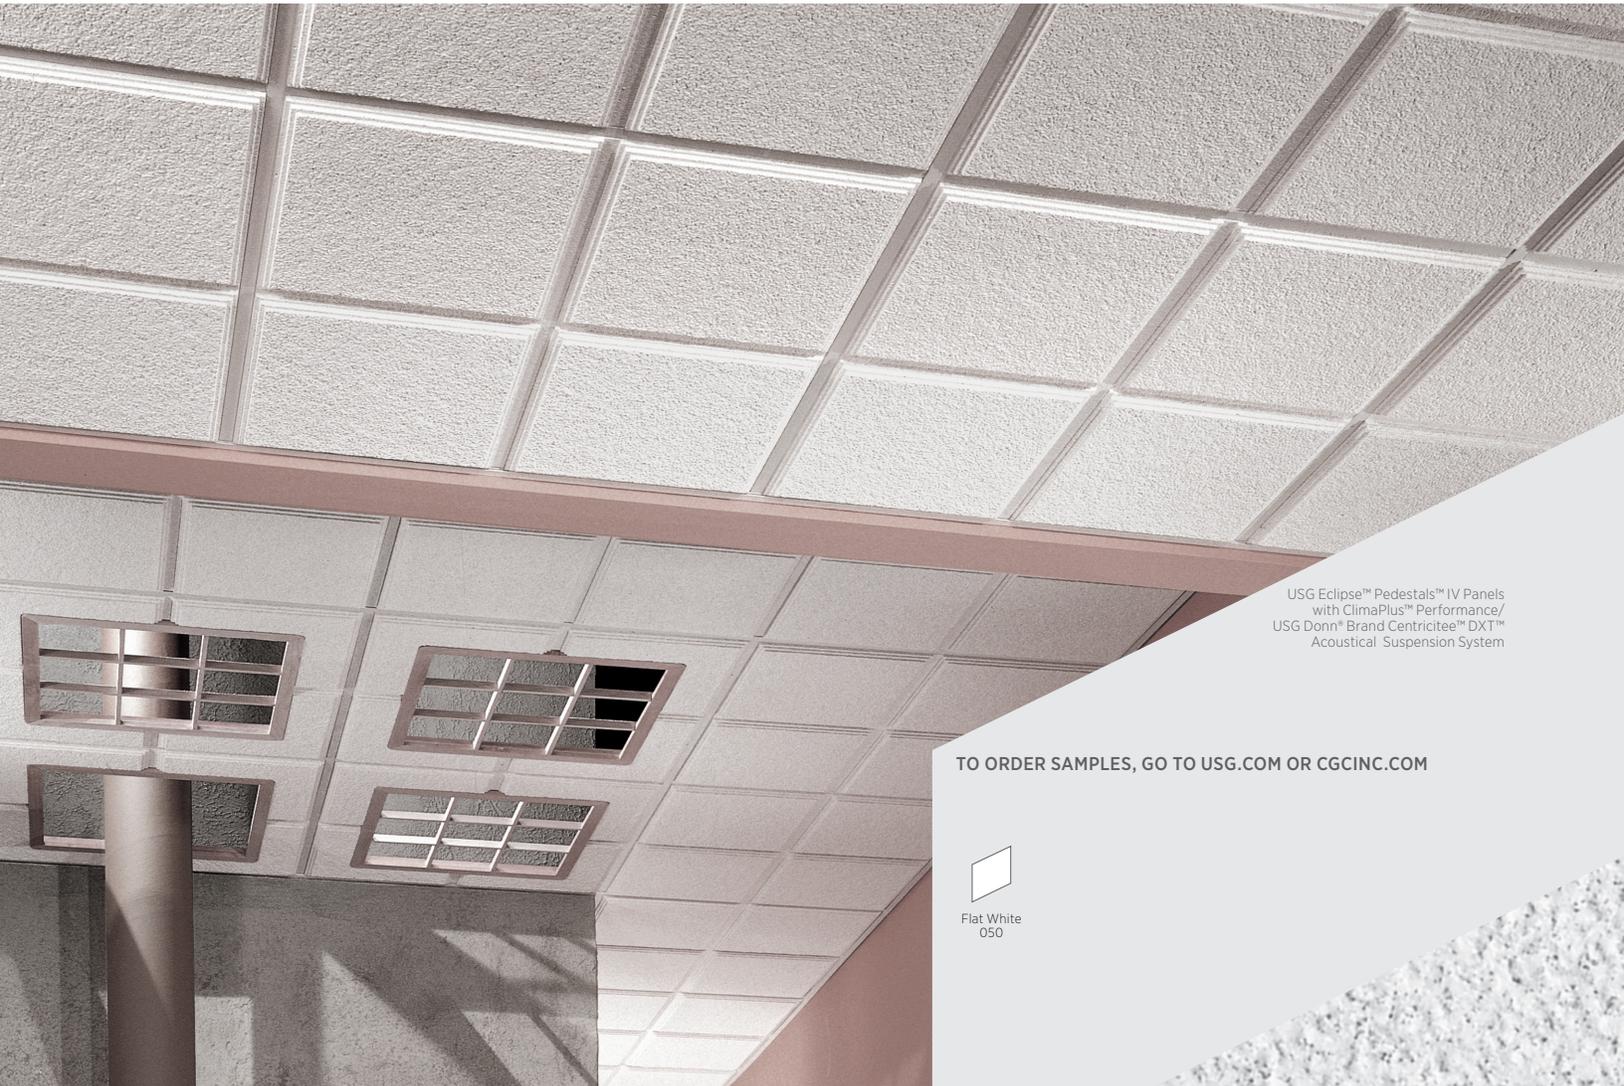

USG Eclipse™ Pedestals™ IV Panels
with ClimaPlus™ Performance/
USG Donn® Brand Centricitee™ DXT™
Acoustical Suspension System

TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM



Flat White
050

FEATURES AND BENEFITS

- A variety of face scores creates the illusion of a smaller-scaled ceiling system without compromising accessibility.
- Solid NRC performance of up to 0.70 meets general office acoustical needs for sound absorption.
- Balanced Acoustics. High-HRC and High-CAC.
- ClimaPlus™ 30-year limited system warranty against visible sag, mold and mildew.

APPLICATIONS

- Boutiques
- Schools
- Reception lobbies
- Transportation terminals

SUBSTRATE

- Wet-formed mineral fiber

Fine-Textured Panel

USG ECLIPSE™ ILLUSION™ & PEDESTALS™ ACOUSTICAL PANELS

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

TECHNICAL SERVICES
800 USG.4YOU (874-4968)



PRODUCT CERTIFIED
FOR LOW CHEMICAL
EMISSIONS:
ULCOM/GG
UL 2818



UL Classified

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR ²	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content ¹	Panel Cost
SLT ³ 	2'x4'x3/4"	Class A	78785	0.70	35	0.84	White	A	Low		79%	\$\$
ILT ⁴ 	2'x4'x3/4"	Class A	78085	0.70	35	0.84	White	B,C	Low		79%	\$\$
SLT ³ 	2'x4'x3/4"	Class A	78711	0.70	35	0.84	White	A	Low		79%	\$\$
ILT ⁴ 	2'x4'x3/4"	Class A	78011	0.70	35	0.84	White	B,C	Low		79%	\$\$
PE/SLT ³ 	2'x2'x3/4"	Class A	72715	0.65	35	0.84	White	D	Low		79%	\$\$
PE/ILT ⁴ 	2'x2'x3/4"	Class A	72015	0.65	35	0.84	White	E,F	Low		79%	\$\$
PE/SLT ³ 	2'x2'x3/4"	Class A	72716	0.65	35	0.84	White	D	Low		79%	\$\$
PE/ILT ⁴ 	2'x2'x3/4"	Class A	72215	0.65	35	0.84	White	E,F	Low		79%	\$\$

USG ECLIPSE™ ILLUSION™ TWO/24 PANELS

USG ECLIPSE™ ILLUSION™ FOUR/48 PANELS

USG ECLIPSE™ PEDESTALS™ I PANELS


USG ECLIPSE™ PEDESTALS™ IV PANELS

PATTERNS

USG Eclipse™ Illusion™ Two/24
The look of 2'x2' panels



USG Eclipse™ Illusion™ Four/48
The look of 48"x6" linear strips



USG Eclipse™ Pedestals™ I
Triple-step scoring



USG Eclipse™ Pedestals™ IV
Triple-step scoring in 12"x12" modules



Low Emissions (VOC)

Third party (GREENGUARD Gold) certified for low-emitting performance, meets California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

ClimaPlus™ Warranty Performance⁵

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.

GRID PROFILE OPTIONS

A USG DX [®] /DXL™	B USG Centricitee™ DXT™	C USG Identitee® DXI™	D USG DX [®] /DXL™	E USG Centricitee™ DXT™	F USG Identitee® DXI™

PHYSICAL DATA/ FOOTNOTES

Product literature
Data sheet: SC1846

ASTM E1264 classification
Type III, Form 1, Pattern EIK (USG Eclipse™ Illusion™) or Pattern EI (USG Eclipse™ Pedestals™)

ASTM E84 and CAN/ULC S102 surface-burning characteristics

Class A
Flame spread: 25 or less
Smoke developed: 50 or less

Weight
1.13 lb./sq. ft.

Online tools
usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance
R-2.0

Maximum backloading
See *USG 30-Year Limited System Warranty Commercial Applications* (SC2102).

Maintenance
Can be cleaned easily with a soft brush or vacuum.

Metric sizes available
Contact sales for minimum quantities and lead times.

Notes

- For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.
- LR values are shown as averages.
- Panels have a 15/16" routing.
- Panels have a 9/16" routing.
- Panel face and back surfaces treated with a proprietary, broad-spectrum antimicrobial additive that inhibits and retards the growth of mold/mildew. For details, see *USG 30-Year Limited System Warranty Commercial Applications* (SC2102) and *ClimaPlus™ Ceilings Certification of Performance* (SC2451).

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC1846/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by
USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, CLIMAPLUS, DONN, DX, DXI, DXL, DXT, ECLIPSE, IDENTITEE, ILLUSION, PEDESTALS, IT'S YOUR WORLD, BUILD IT, the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

