

USG DONN® BRAND TRANSITION MOLDING

DRYWALL TO ACOUSTICAL CEILING TRANSITION MOLDING

USG Donn® Brand DXT™ Transition
Molding with USG Mars™ Acoustical
Panels/USG Donn® Brand Fineline®
DXF™ Acoustical Suspension System


TO ORDER SAMPLES, GO TO USG.COM OR CGCINC.COM

USG DONN® BRAND TRANSITION MOLDING COLOR



Flat White
050

PROFILE

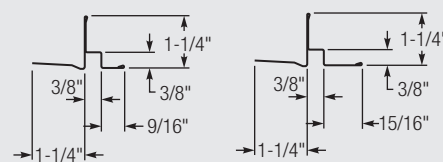

FEATURES AND BENEFITS

- Roll-formed, hot-dipped galvanized steel trims for creating transitions between drywall and acoustical ceilings.
- One-piece acoustical wall molding with an integrated drywall taping flange.
- Eliminates the need to construct drywall fascias for wall molding attachment.
- Taping flange is knurled and perforated to accept joint compound.
- Factory painted to match USG Donn® Brand acoustical suspension systems.
- Compatible with all USG Donn® Brand and USG Drywall suspension systems.

APPLICATIONS

- Contemporary offices
- Entertainment
- Hospitality
- Healthcare
- Retail
- Education

USG DONN® BRAND TRANSITION MOLDING

DRYWALL TO ACOUSTICAL CEILING TRANSITION MOLDING

ORDER SAMPLES/LITERATURE
USG: samplitt@usg.com
fax: 888 874-2348 | usg.com
CGC: contact Sales Representative

TECHNICAL SERVICES
800 USG.4YOU (874-4968)

FOR MOST UP-TO-DATE
TECHNICAL INFORMATION
AND LEED REPORT TOOL
usgdesignstudio.com
cgcdesignstudio.com

COMPONENTS

USG Donn® Brand SL DXT™

USG Donn® Brand SL DX®


INSTALLATION
DETAILS

Shadowline USG Donn®
Brand Transition Molding,
Drywall to Acoustical
Assembly Elevation

RECOMMENDED
FINISHING
INSTRUCTIONS

PHYSICAL DATA/
FOOTNOTES

Profile	Item Number	Exposed Leg	Reveal	Length	Pieces/Carton	LF/Carton
	CPDWA9120	9/16"	3/8"x 3/8"	120"	12	120
	CPDWA15120	15/16"	3/8"x 3/8"	120"	12	120

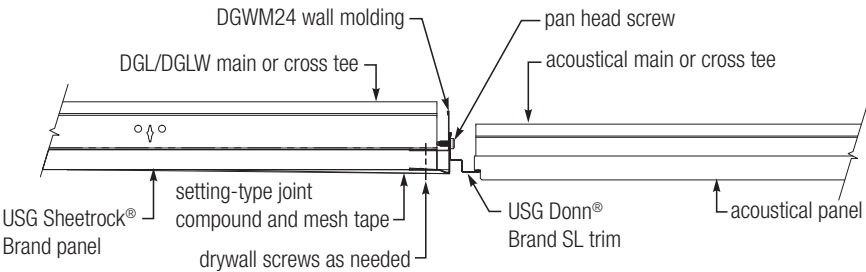

1. Embed mesh tape over flange with setting-type joint compound.
2. Apply second coat of setting-type or ready-mixed joint compound.
3. Apply third coat if needed.

Note:
For complete installation instructions, refer to installation guide AC3318.

Product literature and samples Data sheet: AC3315 Installation guide: AC3318 Sample: 259401	Online tools usgdesignstudio.com or cgcdesignstudio.com	Material Min. G30 hot-dipped galvanized steel. Baked-on polyester paint.	Note For availability in Canada, please contact your local sales representative.
---	---	---	--

Notice
The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

AC3315/rev. 11-16
© 2016 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Manufactured by USG Interiors, LLC
550 West Adams Street
Chicago, IL 60661

The trademarks USG, CGC, DONN, DX, DXF, DXT, FINELINE, MARS, SHEETROCK, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

